



# ROUNDSTACK SIDE

Our round model, in a modern line, suitable for all environments. Equipped with a 'Gran Fuoco' door and a ceramic base protruding on the side.

Available in 2 sizes.

It can be equipped with a CARTER FOR EXTERNAL AIR INTAKE.

# MODELS AND SIZES




1

2

STACK

# INSTALLATION

Measurements in **cm**

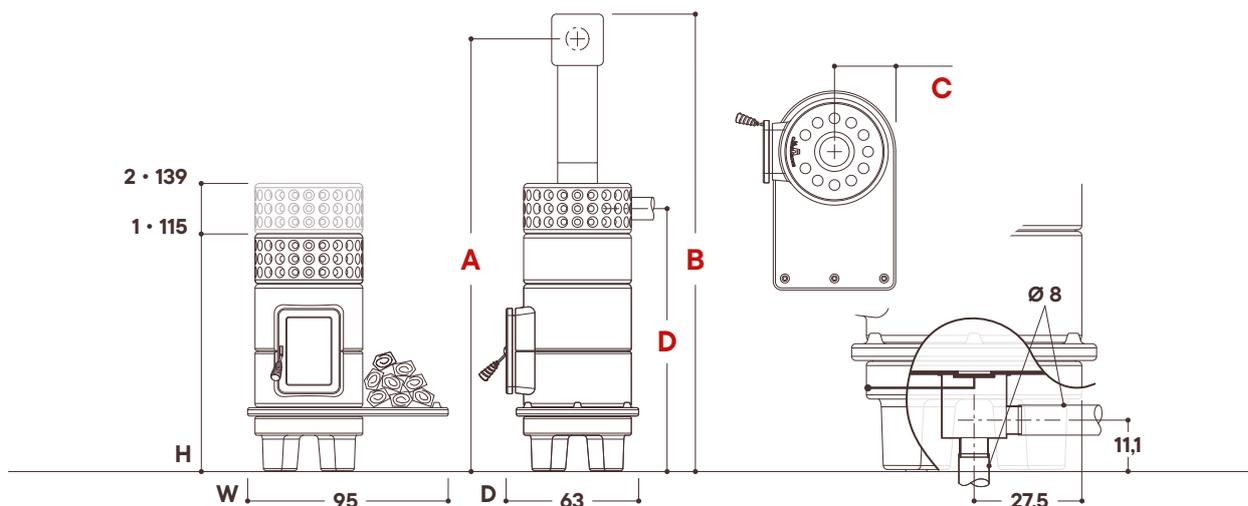

## SIZE

		1	2	
With Ceramic Column h 90 cm	A	cm	218	242
	B	cm	231	255
	C	cm	29	29
	D	cm	NO	126

## CLEARANCES FROM FLAMMABLE MATERIALS

**Side:** 30 cm

**Rear:** 20 cm

**Front** (combustion chamber door): 150 cm

## INSTALLATION NOTES

- » The installations must be made in accordance with UNI 10683 (in Italy) or according to the regulations in force in the country where the stove is installed.
- » In the case of a rear smoke outlet with exposed pipe and flammable material near the stove, it is essential to use a double-walled pipe at least 10 cm away from all flammables.

# TECHNICAL DATA

## SIZE

		1	2
Heat Output *	<i>kW</i>	6,5	7,5
Min-Max Heat Output	<i>kW</i>	4 - 8	4 - 9
Heating Capacity	<i>m³</i>	100 - 230	100 - 260
Efficiency	%	84	80,5
Carbon Monoxide Emission · % Co 13% O <sub>2</sub>	%	0,09	0,07
Dust · 13% O <sub>2</sub>	<i>mg/Nm³</i>	11	6
Wood Consumption	<i>Kg/h</i>	1,9	2,2
Smoke Temperature	°C	201	213
Flue Pipe Diameter	<i>cm</i>	15	15
Draft	<i>Pa</i>	12	12
Total Weight	<i>Kg</i>	230	260
Ceramic Column Weight	<i>Kg</i>	25	25
Measurements (w x d x h)	<i>cm</i>	95 x 63 x 115	95 x 63 x 139
Energy Efficiency		A +	A

\* Complies UNI EN-16510, DEUTSCHLAND BImSchV 2

## CERTIFICATIONS

**CE** UNI EN-16510

15a B-VG 

BImSchV 2 

